




Parts Catalog - Option Detail

| Electronic Parts Catalog - Option Detail | | | | |
|--|--|---------|-----------|-----------|
| Option | Group | Graphic | Film Card | Date |
| FW9196-01 | 16.02 | fw920gh | Z | 26-JUN-95 |
| Engines | 6C8.3, C GAS PLUS CM556, G8.3, G8.3 CM558, GTA8.3 CM558, ISC CM2150, ISC CM554, ISC CM850, ISC8.3 CM2250, ISC8.3 G CM2180 C101, ISL CM2150, ISL CM554, ISL CM850, ISL G CM2180, ISL8.9 CM2150 L110, ISL8.9 CM2880 L112, ISL9 CM2150 SN, ISL9 CM2250, ISL9 CM2350 L101, ISL9 CM2350 L111, ISLE4 CM850, L GAS PLUS CM556, L8.9, L8.9 L121, L8.9G CMOH2.0 L125B, L9 CM2350 L116B, L9 CM2350 L119B, L9 CM2350 L120C, L9 CM2350 L123B, L9.3 L105, L9.5 L117, L9N CM2380 L124B, QSC8.3 CM2250, QSC8.3 CM2880 C102, QSC8.3 CM554, QSC8.3 CM850(CM2850), QSL9 CM2250, QSL9 CM2250 L115, QSL9 CM2350 L102, QSL9 CM2350 L107, QSL9 CM2350 L118, QSL9 CM2350 L122, QSL9 CM554, QSL9 CM850(CM2850), QSL9 G CM558, QSL9 M CM2250 L106, QSL9.3 CM2880 L113 | | | |

©Cummins Inc

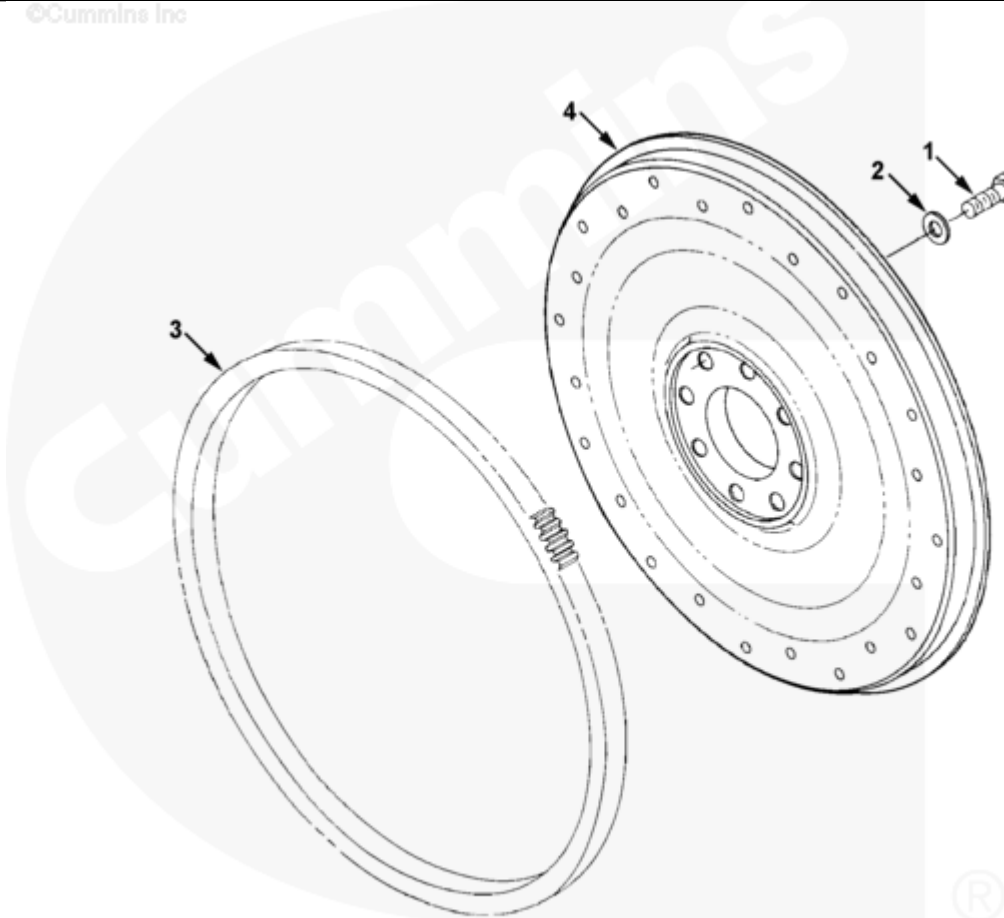

fw920gh

[SMALL](#) | [MEDIUM](#) | [LARGE](#)

| Cart | Ref No | Part Number | Part Description | Required | Remarks |
|--------------|--------|-------------|------------------|----------|-----------------------------------|
| View My Cart | | | | | |
| | | FW9196-01 | Flywheel | | Flywheel...(More) |

| | | | | | |
|--------------------------|---|---------|------------------------|---|------------------------------|
| | | | | | Type: Flywheel |
| | | | | | Housing SAE Size or Type: |
| | | | | | SAE 2 |
| | | | | | Intended Drive Hardware: |
| | | | | | 13" or 14" Automotive |
| | | | | | Material Specification: |
| | | | | | 41,044 |
| | | | | | Ring Gear Pitch: 8/10 |
| | | | | | Ring Gear Tooth Count: 138 |
| | | | | | Crankshaft Flange to Ring |
| | | | | | Gear Leading Edge (MM): 4.3 |
| | | | | | Maximum RPM: 3400 |
| | | | | | Clutch Pilot Bore DIA. (MM): |
| | | | | | 61.973 MM |
| | | | | | Clutch Mounting Bolt Circle |
| | | | | | (MM): 393.70 |
| | | | | | Clutch Mounting Hole Count: |
| | | | | | 12 |
| | | | | | Clutch Mounting Hole |
| | | | | | Spacing: Equal |
| | | | | | Clutch Mounting Hole |
| | | | | | Nonmenclature: 3/8-16 UNC-2B |
| | | | | | Moment of Inertia (KG/M2): |
| | | | | | 0.62 |
| | | | | | Required Starter Center |
| | | | | | Distance (MM): 234.19 |
| | | | | | Applicable Engine Families: |
| | | | | | C Series |
| | | | | | |
| <input type="checkbox"/> | 1 | 3901395 | Hexagon Head Cap Screw | 8 | M12 x 1.25 x 32 |

| | | | | | |
|--------------------------|---|-------------------------|--------------------|---|-----|
| <input type="checkbox"/> | 2 | 3900269 | Plain Washer | 8 | M12 |
| <input type="checkbox"/> | | 3922645 | Flywheel | 1 | |
| <input type="checkbox"/> | 3 | 3902127 | Flywheel Ring Gear | 1 | |
| | 4 | 3922644 | Flywheel | 1 | |

© 2019 Cummins Inc., Box 3005, Columbus, IN 47202-3005 U.S.A.
Terms of Use and Disclaimers | Recommended System Requirements
Need Assistance? Please click on the Contact Us button in the top right corner of any page.