




Parts Catalog - Option Detail

Electronic Parts Catalog - Option Detail				
Option	Group	Graphic	Film Card	Date
ST9272-03	13.05	st952gs	Z	17-OCT-03
Engines	6C8.3, C GAS PLUS CM556, G8.3, G8.3 CM558, GTA8.3 CM558, ISC CM2150, ISC CM554, ISC CM850, ISC8.3 CM2250, ISC8.3 G CM2180 C101, ISL CM2150, ISL CM554, ISL CM850, ISL G CM2180, ISL8.9 CM2150 L110, ISL8.9 CM2880 L112, ISL9 CM2150 SN, ISL9 CM2250, ISL9 CM2350 L101, ISL9 CM2350 L111, ISLE4 CM850, L GAS PLUS CM556, L8.9, L8.9 L121, L8.9G CMOH2.0 L125B, L9 CM2350 L116B, L9 CM2350 L119B, L9 CM2350 L120C, L9 CM2350 L123B, L9.3 L105, L9.5 L117, L9N CM2380 L124B, QSC8.3 CM2250, QSC8.3 CM2880 C102, QSC8.3 CM554, QSC8.3 CM850(CM2850), QSL9 CM2250, QSL9 CM2250 L115, QSL9 CM2350 L102, QSL9 CM2350 L107, QSL9 CM2350 L118, QSL9 CM2350 L122, QSL9 CM554, QSL9 CM850(CM2850), QSL9 G CM558, QSL9 M CM2250 L106, QSL9.3 CM2880 L113			

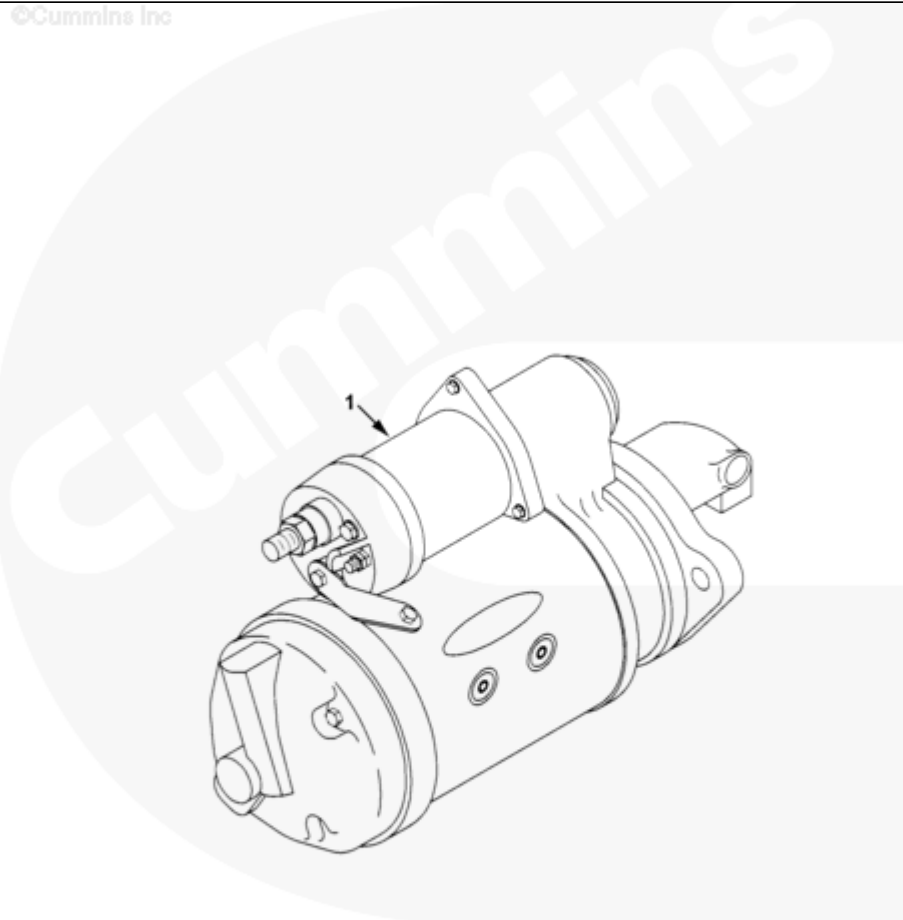

st952gs

Cart	Ref No	Part Number	Part Description	Required	Remarks
View My Cart					
		ST9272-03	Starting Motor		ME03 - STARTING MOTOR...(More)
					Pinion Diametral Pitch: 8/10
					Pinion Gear Outside Diameter:
					46.36 mm
					Pinion Gear Offset: 0
					Pinion Drive Type: Thru Drive
					Mounting Flange Type: SAE#3
					- 3 Bolt 120 deg.
					Frame Size Diameter:
					111.0 mm
					Pilot Diameter: 92.05 mm
					Starter Motor Length: 360 mm
					Acceptable Starter Mounting
					Range: 49 deg. +/- 30 deg.
					Sealing Provision: Sealed
					Supply Method: Mounted
					Cranking Torque: TBD
					Removal Length: 57.15 mm
					Manufacturer: Cummins
					Model: 39 MT - HD
					Voltage: 12V
					Kilowatt Rating: 6.4 KW
					Unique Characteristics:
					Provision for Jump Start
					Protection
<input type="checkbox"/>	1	3102766	Starting Motor	1	

